

HF5111A

Serial Server Device User Manual

V 1.2



Overview of Characteristic

- ✧ MIPS MCU with 16MB Flash and 32MB SRAM
- ✧ Use Linux Operation System
- ✧ Support TCP/IP/Telnet /Modbus TCP Protocol
- ✧ Support Serial To 10/100M Ethernet Conversion, Serial Speed Upto 460800 bps
- ✧ Support 10/100M Ethernet Auto-Negotiation
- ✧ Support Easy Configuration Through a Web Interface or PC IOTService Tool
- ✧ Support Security Protocol Such As TLS/AES/DES3
- ✧ Support Web OTA Wirelss Upgrade
- ✧ Wide DC Input 5~36VDC
- ✧ Size: 95 x 65 x 25 mm (L x W x H)
- ✧ FCC/CE/RoHS Certificated

TABLE OF CONTENTS TABLE OF CONTENTS

TABLE OF CONTENTS TABLE OF CONTENTS	2
LIST OF FIGURES.....	3
LIST OF TABLES	4
HISTORY.....	4
1. PRODUCT OVERVIEW.....	5
1.1. General Description	5
1.2. Device Parameters	5
1.3. Key Application	6
2. HARDWARE INTRODUCTION	7
2.1. Pins Definition	8
2.2. RS232 Interface	9
2.3. RS485 Interface	10
2.4. RS422 Interface	10
2.5. RJ45 Interface	10
2.6. Mechanical Size	11
2.7. Rail Mounting	11
2.8. Order Information	12
2.9. Software Function.....	12
APPENDIX A: CONTACT INFORMATION	13

LIST OF FIGURES

Figure 1.	HF5111A Appearance	7
Figure 2.	HF5111A Interface.....	8
Figure 3.	HF5111A Side View.....	8
Figure 4.	RS232 Pin Defination(Male/Needle Type)	9
Figure 5.	HF5111A RS422 Connection.....	10
Figure 6.	RJ45 Pin Defination	10
Figure 7.	HF5111A Mechanical Dimension.....	11
Figure 8.	HF5111A Rail	12
Figure 9.	HF5111A Product Order Information	12

LIST OF TABLES

Table1.	HF5111A Technical Specifications	5
Table2.	HF5111A Interface Definition.....	9
Table3.	RS232 Interface.....	9
Table4.	RJ45 Interface	11

HISTORY

Ed. V1.0	11-08-2016	First Version
Ed. V1.1	03-03-2017	Add Auto-IP, heartbeat, ntp and UART fast config function(Firmware version:1.07d)
Ed. V1.2	04-16-2019	Update software function to another document.

1. PRODUCT OVERVIEW

1.1. General Description

The HF5111A provides a serial interface to Ethernet connectivity to web enable any device. The HF5111A integrate TCP/IP controller, memory, 10/100M Ethernet transceiver, high-speed serial port and integrates a fully developed TCP/IP network stack and Linux OS. The HF5111A also includes an embedded web server used to remotely configure, monitor, or troubleshoot the attached device.

The HF5111A using highly integrated hardware and software platform, It has been optimized for all kinds of applications in the industrial control, smart grid, personal medical application and remote control that have lower data rates, and transmit or receive data on an infrequent basis.

The HF5111A integrates all serial to Ethernet functionality with 95 x 65 x 25mm size..

1.2. Device Parameters

Table1. HF5111A Technical Specifications

Item	Parameters
System Information	
Processor/Frequency	MIPS/320MHz
Flash/SDRAM	16MB/32MB
Operating System	Linux
Ethernet Port	
Port Number	1 RJ45
Interface Standard	10/100 Base-T Auto-Negotiation
Protection	8KV Isolation
Transformer	Integrated
Network Protocol	IP, TCP, UDP, DHCP, DNS, HTTP Server/Client, ARP, BOOTP, AutoIP, ICMP, Web socket, Telnet, uPNP, NTP, Modbus TCP
Security Protocol	TLS v3 AES 128Bit DES3
Serial Port	
Port Number	1 RS232/RS485/RS422
Interface Standard	RS232: DB9 RS485/RS422: 5.08mm connector
Data Bits	8
Stop Bit	1,2
Check Bit	None, Even, Odd
Baud Rate	TTL: 2400 bps~460800 bps
Flow Control	No Flow control Hardware RTS/CTS、DSR/DTR Software Xon/ Xoff flow control

Software	
Web Pages	Http Web Configuration Customization of HTTP Web Pages
Configuration	Web CLI XML import Telnet IOTService PC Software UART Fast Config
Firmware Upgrade	Web, IOTService Tools
SDK For Dev.	Support
Basic Parameter	
Size	95 x 65 x 25 mm
Operating Temp.	-25 ~ 70°C
Storage Temp.	-45 ~ 105°C, 5 ~ 95% RH (no condensation)
Input Voltage	5~36VDC
Working Current	~200mA
Power	<700mW

1.3. Key Application

The HF5111A device connects serial device to Ethernet networks using the TCP/IP protocol:

- Remote equipment monitoring
- Asset tracking and telemetry
- Security Application
- Industrial sensors and controls
- Medical devices
- ATM machines
- Data collection devices
- Universal Power Supply (UPS) management units
- Telecommunications equipment
- Data display devices
- Handheld instruments
- Modems
- Time/attendance clocks and terminals

2. HARDWARE INTRODUCTION

The HF5111A unit is a complete solution for serial port device connecting to network. This powerful device supports a 10/100BASE-T Ethernet connection, a reliable and proven operating system stored in flash memory, an embedded web server, a full TCP/IP protocol stack, and standards-based (AES) encryption.

Through Ethernet cable connect router with HF5111A serial server for data transfer, which makes the data transformation very simple. HF5111A meet EMC Class B security level, It can pass every countries relevant certification test



Figure 1. HF5111A Appearance

2.1. Pins Definition

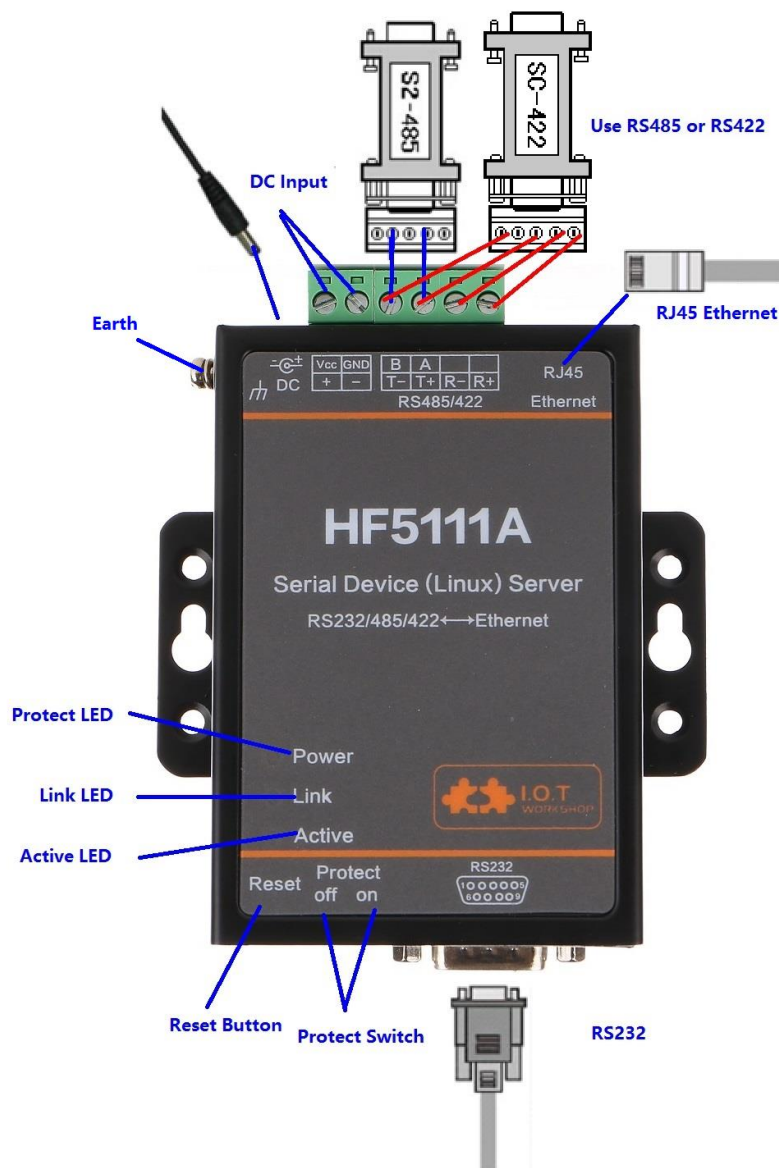


Figure 2. HF5111A Interface

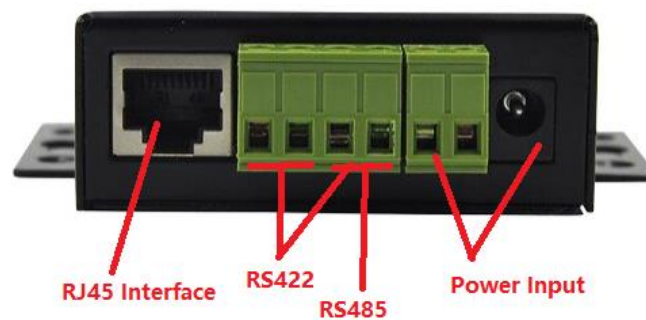


Figure 3. HF5111A Side View

Table2. HF5111A Interface Definition

Function	Name	Description
External Interface	RJ45 Ethernet	10/100M Ethernet
	RS232	RS232 Communication
	RS485/RS422	RS485/RS422 Communicaton
	Earth	Protect Earth
	DC Input	DC Power 5~36V
LED Indicator	Power	Internal Power Supply Indicator On: Power is OK Off: Power is NG
	Link	Connection Indicator On: Ethernet connection is OK Off: No Ethernet connection
	Active	Data transfer Indicator On: Data is transferring. Off: No data transfer
Button	Reset	Reset device
Switch	Protect	Device parameter protect On: Enable protect, working parameter can not be modified. Off: Disable protect.

2.2. RS232 Interface

Device serial port is male(needle), RS232 voltage level(can connect to PC directly), Pin Order is cosistent with PC COM port. Use cross Cable connected with PC(2-3 cross, 7-8 cross, 5-5 direct, 7-8 no connection), see the following table for pin defination.



Figure 4. RS232 Pin Defination(Male/Needle Type)

Table3. RS232 Interface

Pin Number	Name	Description
2	RXD	Receive Data
3	TXD	Send Data
5	GND	GND

Pin Number	Name	Description
7	RTS	Request to Send
8	CTS	Clear to Send

2.3. RS485 Interface

RS485 use two wire links, A(DATA+), B(DATA-). Connect A(+) to A(+), B(-) to B(-) for communication.

The RS485 interface support maximum 32 485 device, special hardware version can support max 255 device. The cable maximum length is 1200 meters. Need to add 120Ohm terminal resistor for over 300 meters.

2.4. RS422 Interface

RS422 interface use T+/T-/R+/R-, cross connect to device as the following picture.

Name	Description
TX+	Transfer Data+
TX-	Transfer Data-
RX+	Receive Data+
RX-	Receive Data-

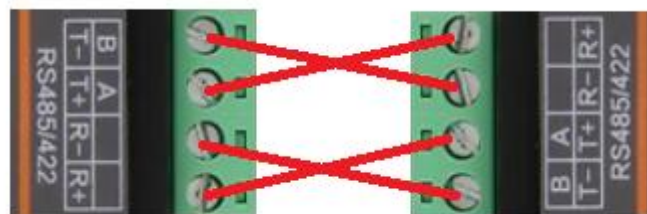


Figure 5. HF5111A RS422 Connection

2.5. RJ45 Interface

Ethernet port is 10M/100M adaptive, support AUTO MDI/MDIX which means it support direct connecting to PC with Ethernet cable.




Figure 6. RJ45 Pin Definition

Table4. RJ45 Interface

Pin Number	Name	Description
1	TX+	Transfer Data+
2	TX-	Transfer Data-
3	RX+	Receive Data+
4	PHY-VCC	Transformer Tap Voltage
5	PHY-VCC	Transformer Tap Voltage
6	RX-	Receive Data-
7	N.C.	None Connect
8	N.C.	None Connect

2.6. Mechanical Size

The dimensions of HF5111A are defined as following picture (mm):



Figure 7. HF5111A Mechanical Dimension

2.7. Rail Mounting

We support to provide rail for mounting as the following picture.

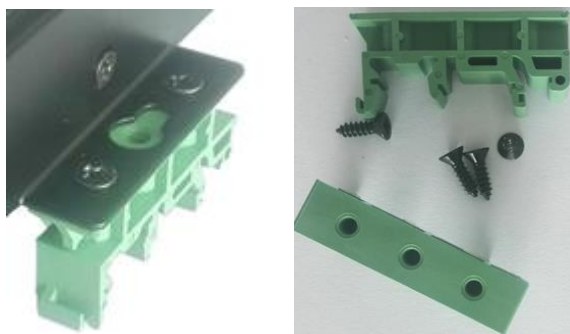


Figure 8. HF5111A Rail

2.8. Order Information

Base on customer detailed requirement, HF5111A provide different configuration version, Details as below:

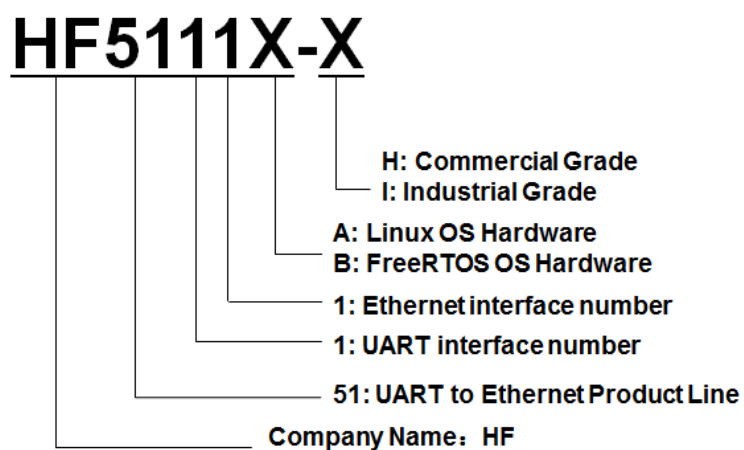


Figure 9. HF5111A Product Order Information

2.9. Software Function

Refer to “IOT_Device_Series_Software_Funtion” for detailed usage.

APPENDIX A: CONTACT INFORMATION

Address: Room 1002,Building 1,No.3000,Longdong Avenue,Pudong New
Area,Shanghai,China,201203

Web: www.iotworkshop.com or www.hi-flying.com

Contact:

Sales: sales@iotworkshop.com

Support: support@iotworkshop.com

Service: service@iotworkshop.com

Business: business@iotworkshop.com

For more information about IOTworkshop modules, applications, and solutions, please visit our web
site www.iotworkshop.com

<END OF DOCUMENT>